

# In line helical gear motor 3x230 V, 50 Hz


F22060075

60/75



- Adapted for variable speed control
- Built-in thermal contact, drawn to terminal
- Compact built-in dimensions
- Two-year product warranty

## DIMENSIONS

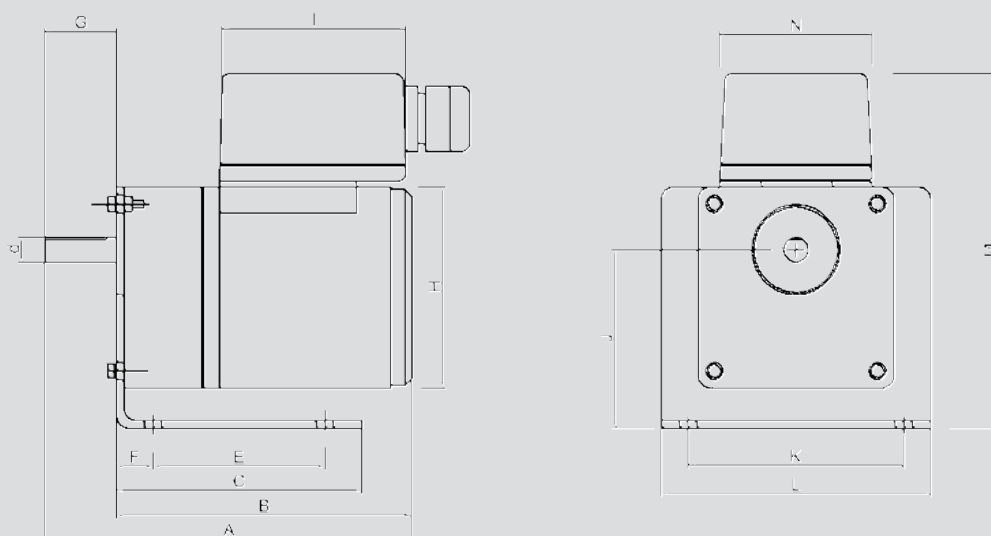

### Construction dimensions (mm)

| MOTOR | A   | B   | C   | d  | E  | F  | G  | H  | I  | J  | K  | L   | M   | N  |
|-------|-----|-----|-----|----|----|----|----|----|----|----|----|-----|-----|----|
| 60/75 | 230 | 200 | 100 | 15 | 70 | 15 | 30 | 87 | 76 | 85 | 88 | 110 | 160 | 62 |

### Technical data at 50 Hz

| Motor                          | 60/75   |
|--------------------------------|---------|
| Rated output                   | 60 W    |
| Rated current at 230 V         | 0,8 A   |
| Rated speed                    | 75 rpm  |
| Gear ratio                     | 1:18    |
| Rated torque                   | 5,5 Nm  |
| Protection form                | IP54    |
| Connection voltage             | 3x230 V |
| Weight including motor bracket | 4,6 kg  |

### Max rotor diameter at rotor speed 12 rmp

| Motor          | 60/75   |
|----------------|---------|
| Rotor diameter | 1800 mm |